

Lifetime FLUSH HOLLOW CORE

STANDARD FLUSH HOLLOW CORE

Subject to Square Edge or Prefit dimensions and tolerances

CORE: Double wall "Grid Fiber" core.

ADHESIVES: "All-Purpose" interior/exterior glue. Type 1 glue available upon request.


THICKNESS: 1-1/8", 1-3/8" and 1-3/4".

STANDARD SIZES: Width: 1/0 thru 3/0 in 2" increments.
Length: 6/0 - 6/6 - 6/8 - 6/10 - 7/0.

OVERSIZE: Width: 3/1 thru 4/0.
Length: 7/1 thru 8/0.

SHORT FORM SPECIFICATIONS: All hollow core doors shall contain double wall reinforced "Grid Fiber" cores and "All-Purpose" glue; as manufactured by Lifetime Doors, Inc.

SPECIES: Unfinished: Hardboard, Lauan, Birch, Ash, Oak
Primelife: Hardboard, Panel (2-3-4-6), Texturelife
Prefinished: Texturelife, Grainlife, Canexel

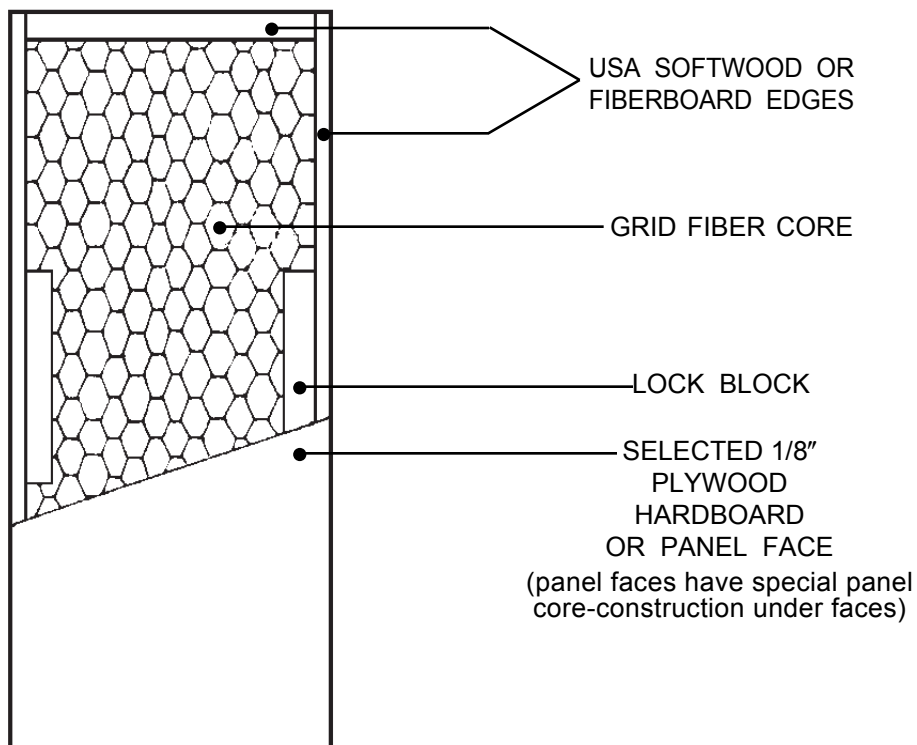

LIFETIME INDUSTRY STANDARD (LT I.S.1-90)

Standard square edge doors are assembled from pre-cut standard frames that conform to Commercial Industry Standards after initial factory trim, prior to Prefit trim. The LIFETIME INDUSTRY STANDARD (LT I.S.1-90) door construction is identical to that of Industry Standard NWWDA I.S.1-87 except that it herein allows a 1-1/8" wood or fiber (pre-trim) rail with a $\pm 1/16$ " tolerance variation on all dimensions of each or any components or overall; and further herein allows final Prefit rail width to be similar to Prefit stile width. Prefit doors are beveled 3° one side, with one lock block only on bevel side, and prefit stiles and rails per customer specification. Panel doors are square or beveled 2 sides with lock blocks on each side. Because various governing standards exist, Lifetime can supply doors in accordance with any other standard upon request.